


# URANUS TC20 - URANUS TC22



 Nuova generazione di smontagomme ad alte prestazioni.

 High level tyre changers range

 Hochleistungs-Reifenmontiermaschinen (neuster Generation)






 La nouvelle génération de démonte-pneus à haute performance






 Nueva generación de desmontadora de alto nivel



# URANUS TC20 - URANUS TC22



 <b>Dati tecnici</b>	 <b>Technical data</b>	 <b>Technische Daten</b>	 <b>Données techniques</b>	 <b>Datos técnicos</b>	<b>URANUS TC20</b>	<b>URANUS TC22</b>
Collegamento rete elettrica	Power supply	Anschluss an die elektrische Versorgung	Branchement au réseau électrique	Enchufe de red electrica	400V-3ph50Hz 230V-3ph50Hz 230V-1ph50Hz	400V-3ph50Hz 230V-3ph50Hz 230V-1ph50Hz
Velocita'	Speed	Geschwindigkeit	Vitesse	Velocidad	1	2
Serraggio esterno cerchioni	External clamp capacity	Äusserer Felgenanzug	Serrage externe des jantes	Capacidad de bloqueo externo	10"-20"	10"-22"
Serraggio interno cerchioni	Internal clamp capacity	Innerer Felgenanzug	Serrage interne des jantes	Capacidad de bloqueo interno	12"-23"	12"-24"
Larghezza cerchioni	Max rim width	Felgenbreite	Largeur des jantes	Max anchura llanta	3"-11"	3"-11"
Max diametro ruota	Max wheel diameter	Max Raddurchmesser	Diamètre maxi de la roue	Diámetro máximo neumático	1100 mm	1100 mm
Campo di lavoro stallonatore	Bead breaker range	Arbeitsbereich der Abdrückschaufel	Champ de travail du détalonneur	Range Destalonador	65-305 mm	65-305 mm
Pressione aria	Air pressure	Luftdruck	Pression de l'air	Presión aire	8-10 bar	8-10 bar
Velocita' di rotazione	Rotation speed	Drehgeschwindigkeit	Vitesse de rotation	Velocidad de rotación	7,5 rpm	7,5-15 rpm
Dimensioni max	Max dimensions	Max Abmessungen	Dimensions maxi	Max dimensión	1960x1660x1270 mm	1960x1660x1270 mm
Palo chiuso	Closed tilting pole	Geschlossener Arm	Bras fermé	Columna cerrada	1860x1660x1800 mm	1860x1660x1800 mm
Peso netto	Net weight	Nettogewicht	Poids net	Peso	223 kg	230 kg


 <b>Dotazione Standard</b>	 <b>Scope Of Delivery</b>	 <b>Standardausstattung</b>	 <b>Dotation Standard</b>	 <b>Volumen de Suministro</b>
Leva alzatalone	Bead lever	Hebel zur Wulstanhebung	Levier leve-talon	Palanca para rueda
Pennello per lubrificante	Lubricant brush	Schmierpinsel	Pinceau de lubrification	Cepillo para lubricante
Set protezioni utensile	Plastic tool protection	Werkzeug-Schutzsatz	Jeu de protections outil	Protección plástico util
Protezione paletta	Plastic bead shovel	Schaufelschutz	Protection palette	Protección plástico para destalonador
Set protezioni griffa	Plastic jaws protection	Klauenschutzsatz	Jeu de protections bride	Protección plástico para garras
Pistoletta di gonfiaggio CE	CE Inflating gun	CE-Druckluftpistole	Pistolet de gonflage CE	Pistola de inflado CE

## Accessori principali • Main accessories • Hauptzubehör • Accessoires principaux • Accesorios principales



Solleva ruota lift90  
**Side lift lift90**  
Radaufheber lift90  
Soulève-roue lit90  
Elevador de rueda lift90

Piatto zincato  
**Galvanized plate**  
Verzinkte platte  
Plateau zingué  
Plato galvanizado

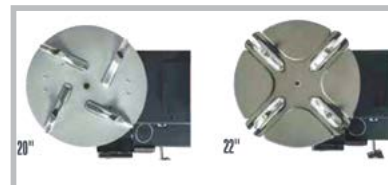

Piatto verniciato  
**Painted plate**  
Lackierte platte  
Plateau verni  
Plato pintado



Pedaliera completamente estraibile per ispezione  
**Completely extractable pedal unit for inspection**  
Pedal-aggregat (zu inspersionzwecke komplett und einfach ausbaubar)  
Pédalier a sortir complètement pour l'inspection  
Pedales completamente extractables para inspección

Braccio premitallone ASSISTANT S  
**Bead pressure device ASSISTANT S**  
Sreifenschulter-niederhaltearm ASSISTANT S  
Bras presse-talon ASSISTANT S  
Brazo empuja talón ASSISTANT S

